

LUMINAIRES - FIRE RATED DOWNLIGHTING

A2-DLM943

Project.....

Comments.....

Fixture Type.....

Prepared By.....

Product Description:

IP65 Fixed Fire Rated Downlight, with an integrated intumescent material that completely seals the downlight and cut-out in the event of a fire. Suitable for use with LED Bulbs. Downlight has been tested in 30, 60 and 90 minute fire rated ceilings. Suitable for Halogen, CFL and LED GU10 lamps.


Product Image:



Product Features:

- Integrated intumescent material completely seals the downlight and cut-out in the event of a fire
- Not for use with dichroic halogen (cool beam) lamps
- Tested in 30, 60 & 90 minute fire rated ceilings
- Tested to BS476 Part 21
- Supplied with GU10 lamp holder fitted
- Reduced height fire rated can allows installation in shallow ceiling voids
- Lamp not included

Product Dimension:

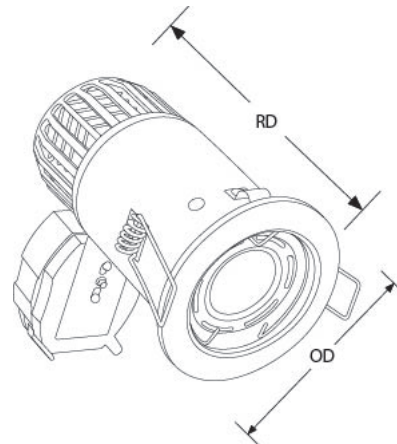

Compliance & Approvals:



Title

Input Voltage	220~240V AC
Input Frequency	50/60HZ
Dimmable	Yes
Dimensions	mm (L) x mm (W) x mm (H) x 82mm (OD) x 115mm (RD) x mm

SKU Table and Ordering

SKU Code
A2-DLM943PB
A2-DLM943PC
A2-DLM943SN
A2-DLM943SS
A2-DLM943W

Warranty

This product has a warranty period of 2 Years from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, and removal of the Q.C. date label; installation in an improper working environment or installation not according to the current edition of the National Electric Code. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

ZA Sales & Distribution

Building 6 Pinewood
Office Park 33 Riley
Road, Woodmead Gauteng
South Africa
Tel : +27 (0) 11 234 4878